


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/04/06'		

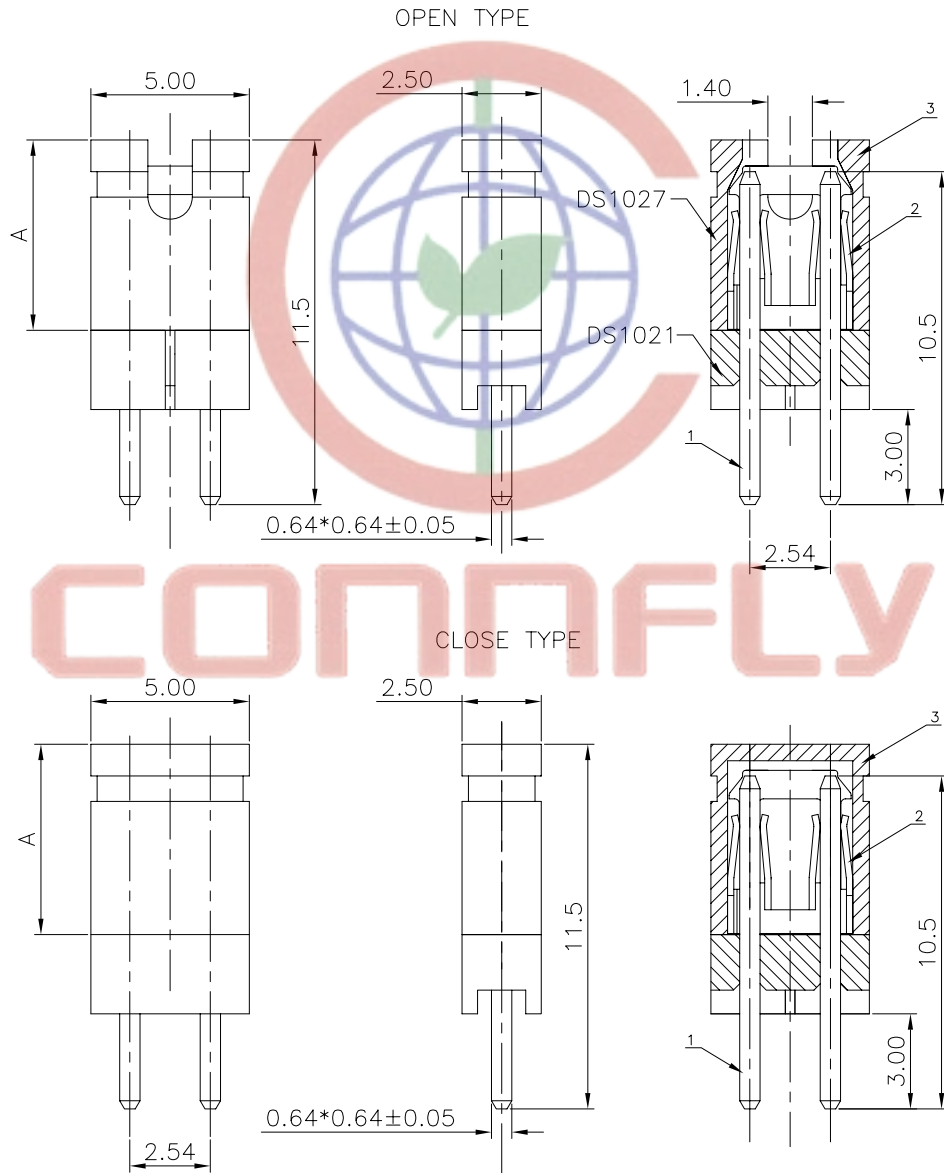

NOTES:

- SPECIFICATION:
  - CONTACT RESISTANCE: 30mΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 500MΩ Min.
  - OPERATING TEMPERATURE: -20°C~+80°C.

2. PRODUCT NUMBER CODE:

DS1027-01-X X X X X X

- CONNECTOR Q'TY  
1: 2 CONNECTOR  
1PCS DS1021; 1PCS DS1027
- PROFILE HEIGHT(DIM A):  
0:6.0mm
- CONTACT PLATING:  
8: FULL GOLD FLASH
- HOUSING COLOR:  
B: BLACK
- HOUSING TYPE:  
A:OPEN B:CLOSE
- No.OF CONTACTS:  
2: 2pin

Tel: 86-574-63508787  
Fax: 86-574-63510817

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS	2.54 MINI JUMPER WITH PIN HEADER
SHEET SIZE	SERIES DS1027-01 SERIES

3	DS1027 Housing		PBT	UL 94 V-0
2	DS1027 Contact		PBT	Gold Flash plated
1	SQ 0.64		Copper alloy	Gold Flash plated
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	C-DS1027-01-XXXXXX


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

E-mail: [sales@zhongxin.com.cn](mailto:sales@zhongxin.com.cn)  
<http://www.zhongxin.com.cn>  
 Add: West Xiaomiao Road, Cixi Ningbo China  
 P.C.: 315321